



Miniview Symphony Multi-function 4-Port KVM Switch (GCS1774)
Miniview Symphony Multi-function 4-Port KVM Switch, KVM/USB2.0 Peripherals Networking/Audio, 4-Port



Model # GCS1774

Description


IOGEAR's Symphony multi-function 4-Port KVM Switch represents the new wave in KVM technology. The Symphony allows you to control four computers using a single VGA monitor, USB keyboard and mouse. In addition, it has a built-in USB 2.0 hub, Ethernet 10/100 switch, and audio sharing capabilities. With its built-in USB 2.0 High Speed hub, slow transfer rates are a thing of the past. Fully compatible with USB 2.0 standards, this KVM allows you to share your USB peripherals and transfer data at up to 480 Mbps. In addition, the audio ports allow you to connect one set of speakers and microphone, and share them among your computers. To complement your KVM setup, IOGEAR's Symphony KVM sports a full-featured Ethernet 10/100 switch. This built-in Ethernet switch allows you to easily network and share internet with your computers. Among its many features, it supports auto-sensing, 10/100 Mbps speed, and is fully compliant with 802.3 networking standard.

Features

- Four 6 ft (1.8m) cables included
- Multi-function USB KVM switch integrates a USB 2.0 hub, Ethernet switch, and audio
- Controls four computers with a single VGA monitor, USB keyboard and mouse
- Built-in USB 2.0 peripheral sharing to share printers, scanners, hard drives, etc., with data transfer rates of up to 480 Mbps.
- Built-in 5 port 10/100 Mbps Ethernet switch allows you to easily network and share Internet with your computers
- Share one set of speakers with all your computers
- Independent switching of KVM, USB peripherals, and audio focus
- Port selection via Hotkeys and front push-buttons
- Auto scan mode for monitoring all computers
- Power on detection – automatically switches to the first powered on port
- Superior video quality - up to 2048 x 1536
- Firmware upgradeable
- Easy installation – no software required
- Keyboard and mouse emulation for error-free boot up
- Hot pluggable – add or remove computers without powering down the switch
- Compatible with multiple operating platforms (PC, Mac, and Sun)



Function Diagram

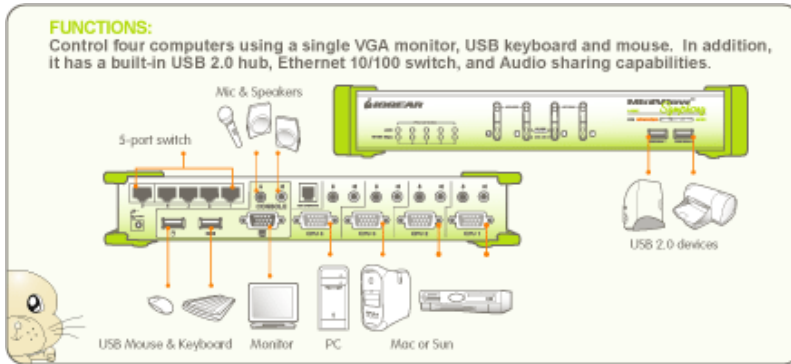

Requirements

CONSOLE

- VGA or SVGA monitor
- USB style mouse
- USB style keyboard

COMPUTER

- 1 x VGA or SVGA port
- 1 x Type A USB port for keyboard/mouse cable
- 1 x Type A USB 2.0 port for USB hub cable
- Supports Windows 98SE/ME/2000/XP; Mac OS 8.6 or higher; Solaris; Linux

AUDIO

- Requires 2-piece powered speaker system

Package Content

- 1 x GCS1774 4-Port KVM Switch
- 4 x Custom 6' (1.8m) KVM cables
- 1 x Firmware upgrade cable
- 1 x Power adapter
- 1 x User manual
- 1 x Quick start guide

Specifications

Function	GCS1774
Resolution	2048 x 1536
Operating Temperature	0-50 Celsius
Port Selection	Hotkeys or Front Panel switches
Storage Temperature	-20-60 Celsius
LAN Connection	10/100 Mbps
Scan Interval	1-99 secs (5 sec default)
Power Consumption	DC 5.3V; 5W; 1000mA
Humidity	0-80% RH
Cable Length	6 ft
CPU Connectors	
Mouse	USB

Keyboard	USB
Monitor	HDB-15
Peripherals	USB 2.0 port

**** Unit Dimensions	
Width	3.5 in
Height	2.19 in
Length	10.63 in

Weight

Unit Pack Wt.	5.51 lbs
Unit Wt.	2.03 lbs
Master Carton Wt.	18.74 lbs

Housing	
Case	Metal

Power

Voltage	1 x DC 5.3V; 2.4A
---------	-------------------

Console Connectors	
Keyboard	1 x USB Type A female
Mouse	1 x USB Type A female
Audio	1 x speaker; 1 x mic
Flash ROM Upgrade	1 x RJ-11
Monitor	1 x HDB-15 female

LEDs

LAN	5 (green)
Link	5 (green)
USB Peripherals	2 (green)

Computer Connections	
Direct	4

***** Unit Package Dimensions**

Width	8.35 in
Length	12.91 in
Height	3.98 in

* Master Carton	
Height	9.17 in
Width	12.76 in
* Master Carton Qty.	3
Depth	13.58 in